

# PYROSPOT DT 40G

## Pyrometers for application in glass industry

### Overview

Digital 2-wire pyrometer with integrated USB interface



### Features

- For temperature measurements between 100 °C and 2500 °C
- 4 to 20 mA temperature linear output
- Integrated USB interface for stand-alone-operation
- Maximum and minimum value storage
- Several fixed optics available
- Stainless steel housing

### Description and applications

The digital pyrometers PYROSPOT DT 40G are specifically designed for applications in glass industry. The devices are suitable for temperature measurement from 100 °C to 2500 °C on glass surfaces, float glass and liquid glass.

The solid body in stainless steel housing allows usage even under rough environmental conditions. With a fast response time of only 60 ms (t95) these pyrometers are also suitable for fast measuring processes. Several fixed optic types realize measuring field diameters from 1.6 mm.

The standard 4 to 20 mA temperature linear output signal allows easy implementation in existing measurement and control systems. The devices are equipped with integrated, galvanically isolated USB interface on the back. The USB interface simplifies parameterization and data evaluation via software, without needing an additional power supply.

The optional integrated LED aiming light enables exact alignment to the measuring object. The LED size is identical to measuring spot size and visible even at high temperatures.

Due to direct USB connection parameters like emissivity sub range, response time and data storage can be easily adjusted through the user friendly parameterization and evaluation software PYROSOFT Spot or optional handheld programming device DHP 1040.



Typical application areas:

- Glass industry
- Flat glass
- Glass bottle production
- Liquid glass
- Glass forms


# PYROSPOT DT 40G

## Pyrometers for application in glass industry

| Technical data                       |                                                                                                                                                   |                                      |                   |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------|
| Type                                 | DT 40G                                                                                                                                            | DT 40G                               | DT 40G            |
| Temperature range                    | 100 °C to 1300 °C                                                                                                                                 | 200 °C to 1400 °C                    | 500 °C to 2500 °C |
| Sub temperature range                | adjustable within temperature range, minimum span 50 °C                                                                                           |                                      |                   |
| Spectral range                       | around 5 µm                                                                                                                                       |                                      |                   |
| Optics                               | several fixed optics (Type 100, 300, 800 and 1200), aperture diameter D = 15 mm                                                                   |                                      |                   |
| Distance ratio                       | 50 : 1                                                                                                                                            |                                      |                   |
| Measurement uncertainty <sup>1</sup> | 1 % of meas. value in °C or 1 K                                                                                                                   |                                      |                   |
| Reproducibility <sup>1</sup>         | 0.5 % of meas. value in °C or 0.5 K                                                                                                               |                                      |                   |
| NETD <sup>2</sup>                    | < 1.0 K <sup>3</sup>                                                                                                                              |                                      |                   |
| Response time (t95)                  | 60 ms, adjustable up to 100 s, adjustable via USB interface                                                                                       |                                      |                   |
| Emissivity ε                         | 0.200 to 1.000, adjustable via USB interface                                                                                                      |                                      |                   |
| Data storage                         | maximum or minimum value storage, adjustable via USB interface                                                                                    |                                      |                   |
| Output                               | 4 to 20 mA, adjustable via software, temperature linear, max. burden: 600 Ω at 24 V                                                               |                                      |                   |
| Interface                            | galvanically isolated USB interface                                                                                                               |                                      |                   |
| Aiming                               | none or optional laser aiming light                                                                                                               | optional integrated LED aiming light |                   |
| Software                             | PYROSOFT Spot for Windows®                                                                                                                        |                                      |                   |
| Parameters                           | emissivity, response time, data storage, sub range, adjustable via USB interface and software                                                     |                                      |                   |
| Power supply                         | 24 V DC ± 25 %, residual ripple 500 mV, LED aiming light: 7 V to 30 V DC, < 200 mW                                                                |                                      |                   |
| Power consumption                    | max. 0.6 W (without aiming light)                                                                                                                 |                                      |                   |
| Operating temperature                | 0 °C to 70 °C                                                                                                                                     |                                      |                   |
| Storage temperature                  | -20 °C to 70 °C                                                                                                                                   |                                      |                   |
| Weight                               | appr. 450 g                                                                                                                                       |                                      |                   |
| Dimensions                           | thread M40 × 1.5, length 125 mm                                                                                                                   |                                      |                   |
| Housing                              | stainless steel with plug connector                                                                                                               |                                      |                   |
| Safety class                         | IP 65 (according to DIN EN 60529 and DIN 40050)                                                                                                   |                                      |                   |
| CE symbol                            | according to EU regulations                                                                                                                       |                                      |                   |
| Scope of delivery                    | PYROSPOT DT 40G, manual, mounting screw nuts, inspection sheet, PYROSOFT Spot for Windows®<br>(without connecting cable, please order separately) |                                      |                   |

<sup>1</sup> For black body radiator, T<sub>v</sub> = 23 °C, t95 = 1 s. Whichever is higher value. <sup>2</sup> Noise equivalent temperature difference. <sup>3</sup> T<sub>v</sub> = 23 °C, ε = 1, t95 = 200 ms, T<sub>object</sub> = 250 °C.

### Dimensional drawing

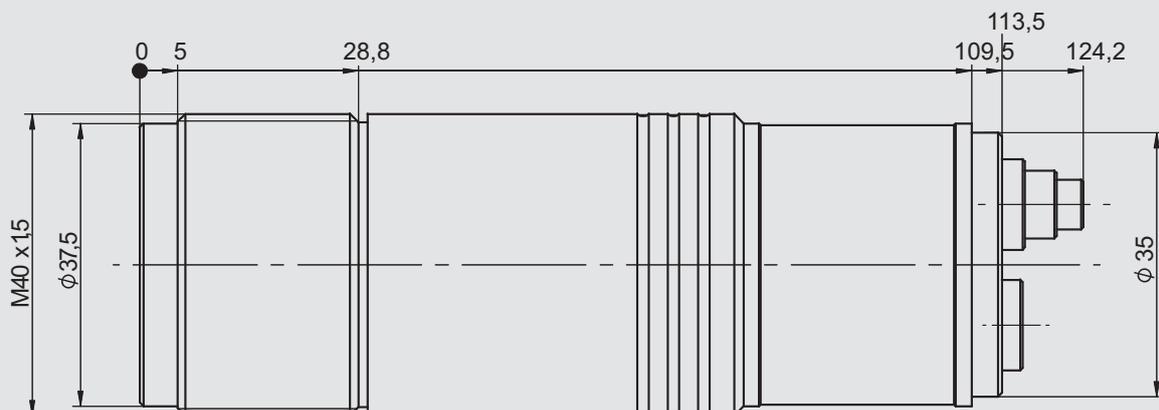


# PYROSPOT DT 40G

Pyrometers for application in glass industry

## Optics 100, 300 and 800


### Optics 100 (sharp point at a = 95 mm measuring distance, marked bold)

| Measuring distance a [mm]                                     | 0                               | 50  | <b>95</b>  | 150  | 200  | 250  | 300  |
|---------------------------------------------------------------|---------------------------------|-----|------------|------|------|------|------|
| Temperature range                                             | Measuring field diameter M [mm] |     |            |      |      |      |      |
| DT 40G (100 °C to 2500 °C) without LED aiming light           | 15.0                            | 7.9 | <b>1.6</b> | 11.0 | 20.0 | 28.0 | 37.0 |
| DT 40G (200 °C to 2500 °C) with LED aiming light <sup>1</sup> | 13.0                            | 7.1 | <b>1.7</b> | 11.0 | 18.0 | 26.0 | 34.0 |

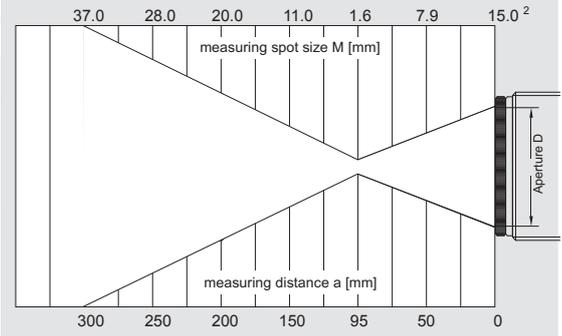


### Optics 300 (sharp point at a = 250/260 mm measuring distance, marked bold)

| Measuring distance a [mm]                           | 0                               | 100  | 250 | <b>260</b> | 400  | 500  | 600  |
|-----------------------------------------------------|---------------------------------|------|-----|------------|------|------|------|
| Temperature range                                   | Measuring field diameter M [mm] |      |     |            |      |      |      |
| DT 40G (100 °C to 2500 °C) without LED aiming light | 15.0                            | 10.8 | 4.6 | <b>4.2</b> | 15.0 | 22.0 | 29.0 |
| DT 40G (200 °C to 2500 °C) with LED aiming light    | 15.0                            | 11.0 | 4.5 | 5.3        | 17.0 | 25.0 | 32.0 |

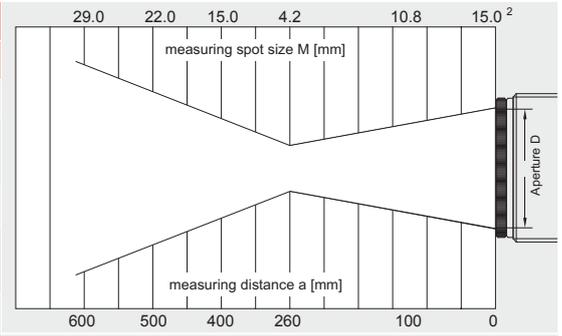


### Optics 800 (sharp point at a = 800 mm measuring distance, marked bold)

| Measuring distance a [mm]                           | 0                               | 300  | 500  | 600  | <b>800</b>  | 1000 | 1200 |
|-----------------------------------------------------|---------------------------------|------|------|------|-------------|------|------|
| Temperature range                                   | Measuring field diameter M [mm] |      |      |      |             |      |      |
| DT 40G (100 °C to 2500 °C) without LED aiming light | 15.0                            | 14.6 | 14.4 | 14.3 | <b>14.0</b> | 18.0 | 24.0 |
| DT 40G (200 °C to 2500 °C) with LED aiming light    | 15.0                            | 14.6 | 14.4 | 14.3 | <b>14.0</b> | 18.0 | 24.0 |

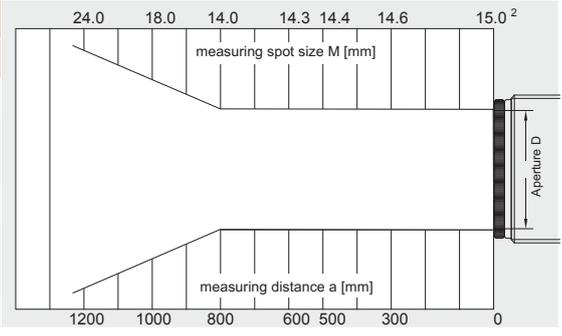

<sup>1</sup> With attachment lens tubus. Aperture D = 13 mm. <sup>2</sup> Measuring field diameter without LED aiming light.

## Connection of a pyrometer with LED aiming light

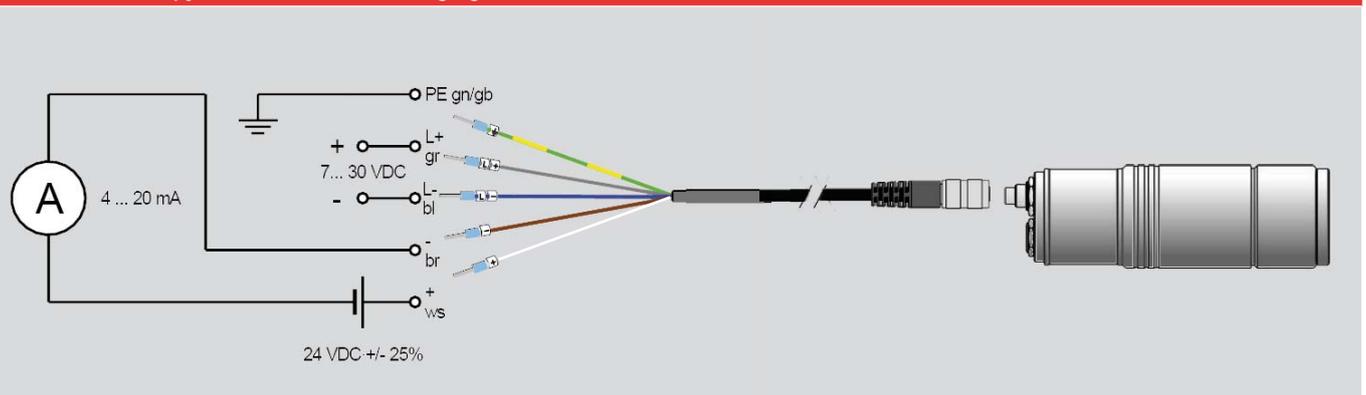

## Order numbers

| Device                        | Optics 100                      | 300                             | 800                             |
|-------------------------------|---------------------------------|---------------------------------|---------------------------------|
| DT 40G (100 °C to 1300 °C)    | 4408541301                      | 4408542301                      | 4408543301                      |
| DT 40G (200 °C to 1400 °C)    | 4408541302,<br>4408551302 (LED) | 4408542302,<br>4408552302 (LED) | 4408543302,<br>4408553302 (LED) |
| DT 40G (500 °C to 2500 °C)    | 4408541303,<br>4408551303 (LED) | 4408542303,<br>4408552303 (LED) | 4408443303,<br>4408553303 (LED) |
| (LED = with LED aiming light) |                                 |                                 |                                 |

# PYROSPOT DT 40G

## Pyrometers for application in glass industry

| Electrical, mechanical and optical accessories <sup>1</sup> |                                                                  | Order number |
|-------------------------------------------------------------|------------------------------------------------------------------|--------------|
| Connecting cable                                            | length 2 m                                                       | 3310A11511   |
|                                                             | length 5 m                                                       | 3310A11512   |
|                                                             | length 10 m                                                      | 3310A11513   |
|                                                             | length 15 m                                                      | 3310A11514   |
|                                                             | length 20 m                                                      | 3310A11515   |
|                                                             | length 30 m                                                      | 3310A11517   |
| USB connecting cable                                        | length 1.8 m, screened                                           | 3310A14010   |
| Power supply                                                | 24 V DC, 0.6 A                                                   | 3310A12010   |
| Mounting angle                                              | fixed                                                            | 3310A21010   |
|                                                             | adjustable                                                       | 3310A21011   |
| Air purge unit                                              | stainless steel, purge air 0.1 to 0.5 bar, oil free              | 3310A22010   |
| Water cooling jacket                                        | stainless steel with integrated air purge unit                   | 3310A23010   |
| Vacuum flange                                               | KF 16                                                            | 3310A24010   |
|                                                             | with ZnSe window                                                 | 3310A34041   |
| Laser aiming light                                          | provided with thread (only for pyrometer without integrated LED) | 3310A33010   |
| DHP 1040                                                    | mobile handheld programming device                               | 3310A17010   |

<sup>1</sup> More accessories available.

### Selected accessories – pictures

| Mounting angle, adjustable                                                          | Window slide                                                                        | Air purge unit                                                                        |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Order number: 3310A21011                                                            | Order number: 3310A21210                                                            | Order number: 3310A22010                                                              |
|  |  |  |
| Water cooling jacket                                                                | Handheld programming device DHP 1040                                                | Digital display DD 200/210                                                            |
| Order number: 3310A23010                                                            | Order number: 3310A17010                                                            | Order number: 3310A13020/3310A13025                                                   |
|  |  |  |

Technische Änderungen vorbehalten. Technical details are subject to change. 23.10.14



We are certified for many years according to ISO 9001

Phone: +49 351 896 74-0  
 Fax: +49 351 896 74-99  
 E-Mail: [info@dias-infrared.de](mailto:info@dias-infrared.de)  
 Internet: [www.dias-infrared.com](http://www.dias-infrared.com)

DIAS Infrared GmbH  
 Pforzheimer Straße 21  
 01189 Dresden  
 Germany